



if PP
industrial **fluid power** products



Also Available

- AQHD - Aquatic and Ducting Deluxe
- SPH - Swimming Pool Hose
- AQHL - Lightweight Ducting & Aquatic Hose
- CDFG - Non-Toxic Delivery Hose



AQH

Standard Weight Ducting and Aquatic

A PVC hose, reinforced with a rigid crush resistant PVC helix. It is tough, flexible and extremely durable under normal operating conditions. The cross section is maintained even when highly flexed. Minimum frictional loss is achieved by the smooth bore.

Applications

Ideally suited to light duty applications for garden ponds and aquatic installations.

Construction

Manufactured from a crush resistant anti-shock PVC Spiral helix encapsulated in a black flexible PVC cover, with a smooth inside wall.

Colour

Standard - Black

Temperature Range

-10°C to +60°C

Size Range

3/8" to 3"
20mm to 60mm

Standard Length


30m and 50m coils

Special Features

- UV resistant
- Tough, flexible and extremely durable under normal operating conditions
- Crush resistant helix
- Cross section maintained even when highly flexed
- Non-toxic

GRIFLEX
hose & ducting solutions



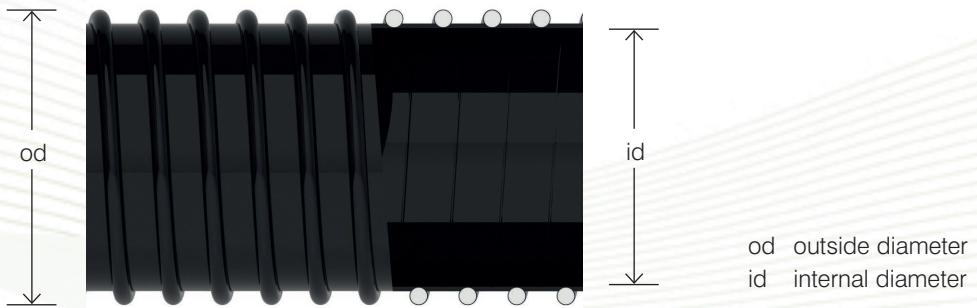

od outside diameter
id internal diameter

AQH - Standard Weight Ducting & Aquatic Hose

| Product Ref. | Internal Dia. Inches | Internal Dia. mm | External Dia. mm | Wall Thickness | Weight kg/m | Min. Bend Radius mm | Vacuum m of H ₂ O | Working Pressure Bar | Coil Length Metres |
|--------------|----------------------|------------------|------------------|----------------|-------------|---------------------|------------------------------|----------------------|--------------------|
| AQH04 | 3/8" | 10.0 | 14.4 | 2.2 | 0.07 | 10 | 5 | 2.0 | 30 / 50 |
| AQH05 | 1/2" | 12.0 | 16.4 | 2.2 | 0.09 | 10 | 5 | 2.0 | 30 / 50 |
| AQH06 | 5/8" | 16.0 | 20.8 | 2.4 | 0.12 | 10 | 5 | 2.0 | 30 / 50 |
| AQH07 | 3/4" | 19.0 | 23.8 | 2.4 | 0.14 | 10 | 5 | 2.0 | 30 / 50 |
| AQHM20 | Metric | 20.0 | 25.0 | 2.5 | 0.15 | 20 | 5 | 2.0 | 30 / 50 |
| AQH10 | 1" | 25.4 | 31.0 | 2.8 | 0.20 | 30 | 5 | 2.0 | 30 / 50 |
| AQHM28 | Metric | 28.0 | 33.6 | 2.8 | 0.23 | 30 | 5 | 2.0 | 30 / 50 |
| AQHM30 | Metric | 30.0 | 36.0 | 3.0 | 0.27 | 30 | 5 | 2.0 | 30 / 50 |
| AQH12 | 1 1/4" | 32.0 | 38.0 | 3.0 | 0.28 | 30 | 5 | 2.0 | 30 / 50 |
| AQHM35 | Metric | 35.0 | 41.0 | 3.0 | 0.35 | 30 | 4 | 2.0 | 30 / 50 |
| AQH15 | 1 1/2" | 38.0 | 44.4 | 3.2 | 0.35 | 40 | 4 | 2.0 | 30 / 50 |
| AQHM40 | Metric | 40.0 | 47.0 | 3.5 | 0.36 | 40 | 4 | 1.0 | 30 / 50 |
| AQHM45 | Metric | 45.0 | 52.2 | 3.6 | 0.42 | 40 | 4 | 1.0 | 30 / 50 |
| AQH20 | 2" | 51.6 | 58.8 | 3.6 | 0.51 | 50 | 4 | 1.0 | 30 / 50 |
| AQHM60 | Metric | 60.0 | 68.0 | 4.0 | 0.62 | 60 | 4 | 1.0 | 30 / 50 |
| AQH25 | 2 1/2" | 63.0 | 71.2 | 4.1 | 0.69 | 70 | 4 | 1.0 | 30 / 50 |
| AQH30 | 3" | 76.0 | 85.2 | 4.6 | 0.88 | 80 | 4 | 1.0 | 30 / 50 |

All sizes are nominal and normal manufacturing tolerances apply.

Special Sizes are available on request but may be subject to Minimum Order Quantities and Leadtimes.

- (i) Maximum working pressure is based on a factor of safety of 3:1 on short term burst pressure at 20°C. If the temperature increases, please refer to the temperature pressure charts.
- (ii) Lengths detailed above are as standard, however variations may be available subject to minimum order quantities. Weights are approximate dependent upon working tolerance and density of materials.
- (iii) Bending diameter information is intended as a guide to the minimum bend radius at 20°C ambient temperature without restricting the bore. It does not mean that the hose cannot be bent below the given dimensions but restriction is likely to occur.



VAT: 472709865

