




**if PP**  
industrial **fluid power** products

**NEW**

#### Also Available

- WF - Clear/Wire Reinforced Hose
- SF - Springflex™ Clear/Wire Reinforced Hose
- SFBFG - Springflex™ Non-Toxic Braided Hose
- SFBOR - Springflex™ Braided Oil Resistant Hose

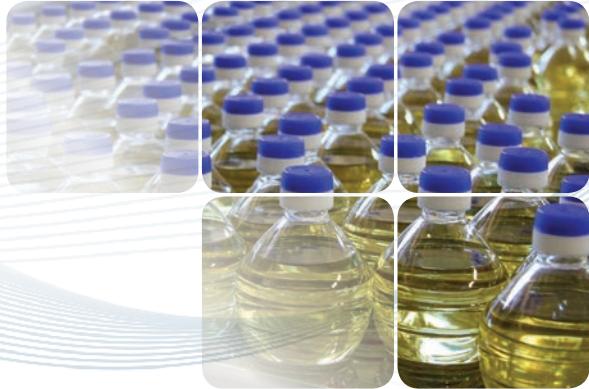

## **WFB Wireflex™**

### Braided

A braided food quality hose with very high working pressures. It is manufactured from two layers of soft PVC compound a steel spiral embedded in the first layer and polyester yarn reinforcement between the first and second layer. Tough, flexible and designed for the suction and delivery of liquid foodstuffs in arduous applications.

#### Applications

Water, slurries, granules, foodstuffs and dilute chemicals. Wireflex is ideally suited to applications in the agricultural, food processing, plastics handling, marine and construction industries.

#### Construction

High tensile carbon steel wire and high tensile polyester fibres encapsulated in two layers of PVC with a smooth inside wall.

#### Colour

Standard - Clear or Black

Other colours available subject to minimum order quantity

#### Temperature Range

-10°C to +55°C

#### Size Range

¾" to 2", 2 ½" to 4" late 2019  
35 and 45mm, 60 and 80mm late 2019

#### Standard Length

30m Coils  
50m Coils also available up to 80mm  
Other lengths available subject to minimum order quantity

#### Special Features


- Very high working pressures
- Very good for vacuum
- Exceptional kink and crush resistance from high tensile steel spiral
- Tough, very flexible and extremely durable
- Outstanding resistance to the effects of weather
- Minimum frictional loss is achieved by the smooth bore
- Excellent chemical resistance
- Extra UV if ordered in black

# **GRIFLEX**

hose & ducting solutions

VAT: 472709865



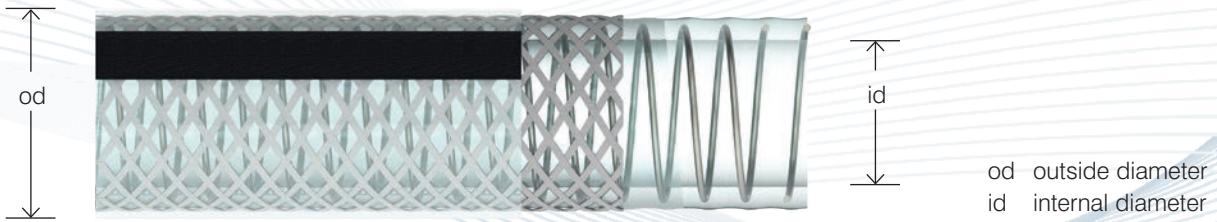

### WFB - Wireflex Braided

Product Ref.	Internal Dia. Inches	Internal Dia. mm	External Dia. mm	Wall Thickness Overall mm	Weight kg/m	Min. Bend Radius mm	Vacuum m of H <sub>2</sub> O	Working Pressure Bar	Coil Length Metres
WFB04	3/8"	10	19.0	4.5	0.4	25	9	25.5	30 / 50
WFB05	1/2"	13	22.0	4.5	0.5	30	9	25.5	30 / 50
WFB06	5/8"	16	25.0	4.5	0.6	35	9	21.5	30 / 50
WFB07	3/4"	19	28.0	4.5	0.7	40	9	17.0	30 / 50
WFB10	1"	25	36.9	6.0	1.2	60	9	15.5	30 / 50
WFB12	1 1/4"	32	43.0	5.5	1.4	80	9	13.5	30 / 50
WFBM35	Metric	35	46.8	5.9	1.6	95	9	12.0	30 / 50
WFB15	1 1/2"	38	50.0	6.0	1.8	100	9	12.0	30 / 50
WFBM45	Metric	45	58.0	6.5	2.4	120	9	10.0	30 / 50
WFB20	2"	51	65.0	7.0	2.8	130	9	10.0	30 / 50
WFBM60	Metric	60	74.2	7.1	3.6	200	9	8.0	30 / 50
WFB25	2 1/2"	63	77.2	7.1	3.7	210	9	7.0	30 / 50
WFB35	3"	76	92.8	8.4	5.0	250	9	6.5	30 / 50
WFBM80	Metric	80	96.0	8.0	5.2	300	9	4.5	30 / 50
WFB35	3 1/2"	90	106.4	8.2	6.0	350	9	4.5	30
WFB40	4"	102	122.0	10.0	8.0	400	9	4.0	30
WFB50	5"	127	147.2	10.1	10.0	500	9	2.5	20
WFB60	6"	152	175.0	11.5	14.0	600	9	2.0	20

All sizes are nominal and normal manufacturing tolerances apply.

Special Sizes are available on request but may be subject to Minimum Order Quantities and Leadtimes.

- (i) Maximum working pressure is based on a factor of safety of 3:1 on short term burst pressure at 20°C. If the temperature increases, please refer to the temperature pressure charts.
- (ii) Lengths detailed above are as standard, however variations may be available subject to minimum order quantities. Weights are approximate dependent upon working tolerance and density of materials.
- (iii) Bending diameter information is intended as a guide to the minimum bend radius at 20°C ambient temperature without restricting the bore. It does not mean that the hose cannot be bent below the given dimensions but restriction is likely to occur.

