



**if PP**  
industrial fluid power products

**NEW**

#### Also Available

- APWH - All Purpose Water Hose
- PWH - Professional Water Hose
- FLU - Reinforced Fluted Water Hose
- HN - Clear Braided PVC Hose



## BCH

### Black Contractor Hose

**A black unreinforced PVC hose that is resistance to the effects of weather, especially UV. Minimum frictional loss is achieved by the smooth bore. Excellent chemical resistance.**

#### Applications

BCH tubing is extremely versatile and can be used in a wide range of low pressure applications including the transfer of liquids, acids, gases.

#### Construction

Black unreinforced flexible PVC

#### Colour

Standard - Black

Other colours available subject to minimum order quantity

#### Temperature Range

-10°C to +55°C

#### Size Range

1/2" to 1"

#### Standard Length

30m Coils


Other lengths available subject to minimum order quantity

#### Special Features

- Outstanding resistance to the effects of weather, especially UV
- Minimum frictional loss is achieved by the smooth bore
- Excellent chemical resistance

**GRIFLEX**  
hose & ducting solutions



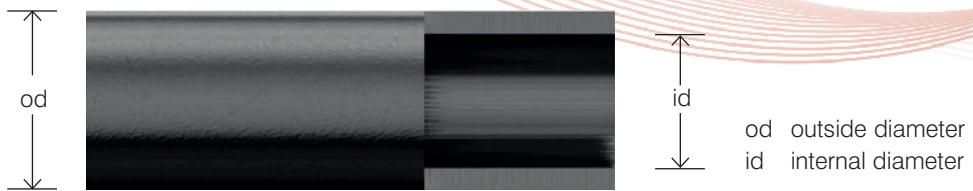

### BCH - Black Contractor Hose

Product Ref.	Internal Dia. Inches	Internal Dia. mm	External Dia. mm	Wall Thickness Overall mm	Weight kg/m	Min. Bend Radius mm	Coil Length Metres
BCH12/18	1/2"	12	18.5	3.0	0.17	96	30 / 50
BCH19/25	3/4"	19	25.0	3.0	0.26	152	30 / 50
BCH25/31	1"	25	31.0	3.0	0.32	200	30 / 50

All sizes are nominal and normal manufacturing tolerances apply.

Special Sizes are available on request but may be subject to Minimum Order Quantities and Leadtimes.

- (i) Maximum working pressure is based on a factor of safety of 3:1 on short term burst pressure at 20°C. If the temperature increases, please refer to the temperature pressure charts.
- (ii) Lengths detailed above are as standard, however variations may be available subject to minimum order quantities. Weights are approximate dependent upon working tolerance and density of materials.
- (iii) Bending diameter information is intended as a guide to the minimum bend radius at 20°C ambient temperature without restricting the bore. It does not mean that the hose cannot be bent below the given dimensions but restriction is likely to occur.



VAT: 472709865

