



if PP
industrial **fluid power** products



Also Available

- BCH - Black Contractor Hose
- PWH - Professional Water Hose
- FLU - Reinforced Fluted Water Hose
- SPH - Swimming Pool Hose



APWH

All Purpose Water Hose

The all purpose water hose range offers outstanding low temperature characteristics combined with flexibility and has been designed for the professional.

Applications

Suitable for general purpose water applications, including sports grounds, agricultural and horticultural and domestic garden applications.

Construction

Two layers of smooth PVC bonded together encapsulating high tensile polyester fibres.

Colour

Yellow and Translucent Green

Temperature Range

-10°C to +55°C

Size Range

½" to 1"

Standard Length


30m, 50m and 100m Coils

Special Features

- Outstanding low temperature characteristics combined with flexibility
- Outstanding resistance to the effects of weather
- Minimum frictional loss is achieved by the smooth bore
- Excellent chemical resistance

GRIFLEX
hose & ducting solutions



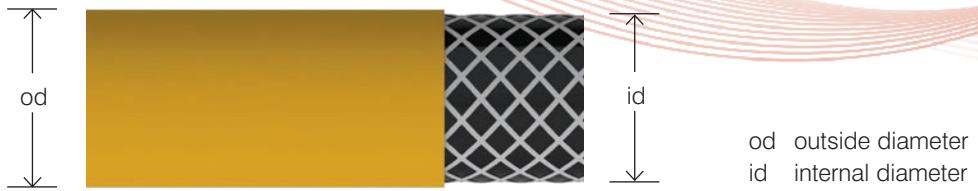

APWH - All Purpose PVC Water Hose, Yellow and Translucent Green

Product Ref.	Internal Dia. Inches	Internal Dia. mm	External Dia. mm	Wall Thickness Overall mm	Weight kg/m	Min. Bend Radius mm	Working Pressure Bar	Coil Length Metres
APWH12.5	1/2"	12.5	17.0	2.3	0.15	63	10	30 / 50
APWH19	3/4"	19	24.5	2.75	0.28	95	10	30 / 50
APWH25	1"	25	31.0	3.0	0.40	125	10	30 / 50

All sizes are nominal and normal manufacturing tolerances apply.

Special Sizes are available on request but may be subject to Minimum Order Quantities and Leadtimes.

- (i) Maximum working pressure is based on a factor of safety of 3:1 on short term burst pressure at 20°C. If the temperature increases, please refer to the temperature pressure charts.
- (ii) Lengths detailed above are as standard, however variations may be available subject to minimum order quantities. Weights are approximate dependent upon working tolerance and density of materials.
- (iii) Bending diameter information is intended as a guide to the minimum bend radius at 20°C ambient temperature without restricting the bore. It does not mean that the hose cannot be bent below the given dimensions but restriction is likely to occur.

