




AERSTEL D /40

HIGH TEMPERATURE COMPRESSED AIR HOSE

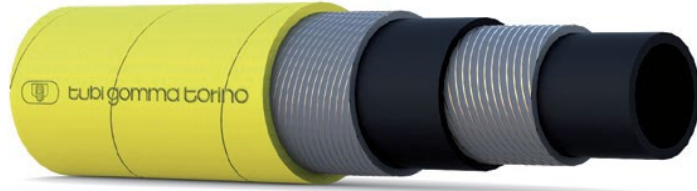

- ✓ High-temperature air delivery
- ✓ Heavy-duty pneumatic tools
- ✓ Yellow EPDM cover
- ✓ Heat-resistant rubber compound

APPLICATION

Delivery hose for high temperature compressed air suitable for heavy duty pneumatic tools in road constructions, railways works, tunneling and mining, etc.

TUBE

Black, smooth, EPM rubber compound

REINFORCEMENT

High strength synthetic plies

COVER

Yellow, smooth, cloth impression EPDM rubber compound, abrasion and weather resistant

KEY PERFORMANCE

Temperature:	-30°C to +160°C
Range	-22°F to +320°F
Working Pressure:	30-40 bar <small>(size dependent)</small>
Bursting Pressure:	120-160 bar

ID		OD		WEIGHT	WP		BP		BENDING RADIUS	COIL LENGTH
mm	inch	mm	inch		bar	psi	bar	psi		
19	3/4	28	1 7/64	0.54	40	600	160	2400	95	61
25	1	34	1 11/32	0.69	40	600	160	2400	125	61
32	1 1/4	42	1 21/32	1.07	40	600	160	2400	160	61
38	1 1/2	48	1 57/64	1.27	40	600	160	2400	190	61
51	2	64	2 17/32	1.99	40	600	160	2400	255	61
63	2 1/2	77	3 5/16	2.43	30	450	120	1800	315	61
76	3	90	3 35/64	2.90	30	450	120	1800	380	61
102	4	122	4 51/64	4.10	30	450	120	1800	510	61

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING

TGT AERSTEL D W.P. 40 BAR ITALY tubi gomma torino

