




ABRAPLUS D /85 TEX

TEXTILE CONCRETE HOSE

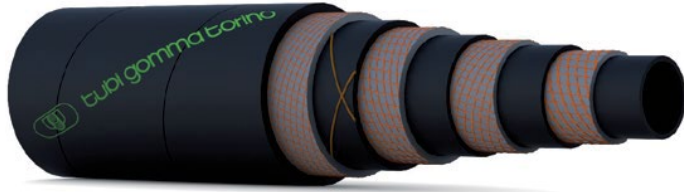

- ✓ High-pressure concrete pumping hose
- ✓ Textile reinforced construction
- ✓ ISO 4649 35 ± 5 mm³
- ✓ Construction & civil engineering use

APPLICATION

Concrete pump hose

TUBE

Black, smooth, **synthetic** antistatic rubber compound

REINFORCEMENT

High strength **synthetic** plies

COVER

Black, smooth, antistatic cloth impression **SBR/NR** rubber compound, resistant to abrasion and weathering.

KEY PERFORMANCE

Temperature: -40°C to +85°C
Range -40°F to +185°F

Working Pressure: 85 bar

Bursting Pressure: 170 bar

ID		OD		WEIGHT	WP		BP		BENDING RADIUS	COIL LENGTH
mm	inch	mm	inch		bar	psi	bar	psi		
25	1	43	1 45/64	0,84	85	1233	170	2466	160	61
32	1 1/4	49	1 15/16	1,22	85	1233	170	2466	200	61
38	1 1/2	59	2 21/64	1,84	85	1233	170	2466	240	61
51	2	72	2 53/64	2,40	85	1233	170	2466	300	61
63,5	2 1/2	86	3 25/34	3,00	85	1233	170	2466	400	61
76	3	100	3 15/16	3,65	85	1233	170	2466	480	61
90	3 1/2	119	4 11/16	4,14	85	1233	170	2466	570	61
102	4	128	53/64	4,72	85	1233	170	2466	650	61
127	5	158	6 1/4	6,37	85	1233	170	2466	820	61

Other diameters, pressure ratings are available on request. Technical data, structures and polymers are subject to change without notice.

BRANDING



sales@ifpp.co.uk



www.ifpp.co.uk